

ControlledCare Buttons Station x2 buttons, x3 buttons, x4 buttons versions

### Features


- Single gange Size
- Push button and multi color LED for nurse presence indication
- Push button and yellow LED for aide presence indication
- Automatic nurse follower transfer
- Flame retardant (UL® 94V-0) plastic faceplate

### Description

The Buttons Station provides push button registration of nurse presence (LED indication), or aide presence (LED indication) at remote locations. The nurse/aide presence indicator unit can also be used to transfer nurse follower feature from room to room as nursing staff proceeds with rounds. Depressing the nurse presence registration button automatically transfers indication of all subsequent patient calls to the remote location of the nurse, as well as to the master station. Plug-in connectors provide for simple wiring.

### Specifications

Dimensions:	Height:	4.50"	(114 mm)
	Width:	2.75"	(70 mm)
	Depth:	1.50"	(38 mm)
	Projects:	0.4375"	(11 mm) from mounting surface
Construction:	Flame retardant (UL® 94V-0) plastic faceplate. Switches and electronic components are circuit board mounted.		
Connections:	Plug-in connectors.		
Housing:	Single gang ring (IH357) with square box (IH358), or exact equal.		

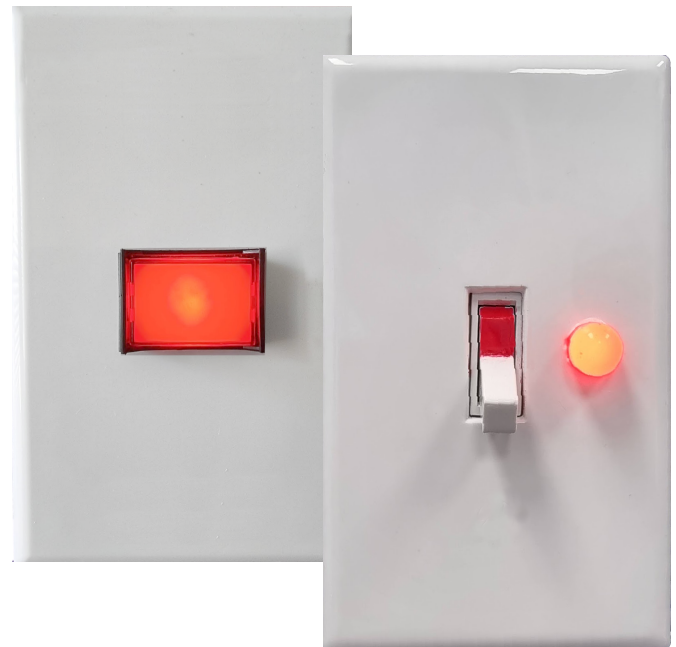

Buttons Station Toggle/Sliding

### Options

- 2 Buttons and One Bed Cord Input
- 3 Buttons and 2 bed Cords
- 4 Buttons and 2 bed Cords
- 1 Button and 1 Pull Cord

### Applicable Systems

- Wired Nurse Call System
- Wireless Nurse Call System